



## Hitron CODA 4680 Installation Guide

# Package Contents

## Package Contents



HITRON CODA 4680  
INTERNET MODEM








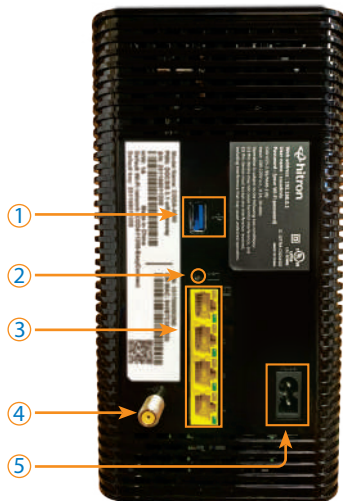
ETHERNET CABLE



POWER ADAPTER

Items may not be  
exactly as shown.

- ① **USB**  Connect to select devices.  
(Feature not supported)
- ② **Reset**  Pinhole button to reset your  
modem.  
(Should only be used with the guidance  
of a Comwave Tech Support)
- ③ **Ethernet**  Connect provided Ethernet  
(1 to 4) cable to any one of the  
Ethernet (LAN) ports.
- ④ **Cable**  Connect cable jack internet  
line here. (Cable not provided)
- ⑤ **Power Adapter**  Connect provided Power  
Adapter cable here.



# LED Light Indicators



Please follow the step-by-step instructions on the following pages.

- Power
- Downstream (Steady Blue)
- Upstream (Steady Blue)
- Online (Steady Green)
- Wireless (2.4GHZ)
- Wireless (5GHZ)
- WPS (WiFi Protected Setup)

# Wi-Fi Setup

## OPTION 1 Computer Connection

From your computer, directly connect to the modem. Go to <http://192.168.0.1>

Hiltron East Connect Wizard will appear, click on 'LET'S GO'.



## OPTION 2 Wireless Connection

From your wireless device, connect to the wireless default network as labeled on the back of your modem.

**Note:** The new wireless password you created will also be the modem administration password for user *cusadmin*.



# Advanced Wi-Fi Settings

In order to change the network name and/or password after completing the Wizard, follow the steps below.



**STEP 1** Open your internet browser and type <http://192.168.0.1> in the address bar.

**STEP 2** Enter your **Username:** "cusadmin" and your current Wi-Fi password. Click **LOGIN** to proceed.

**STEP 3** Click on the **Wireless** located on the top menu bar.

**STEP 4** Click the **Basic Settings** tab (first tab).  
a. Change your SSID network name  
b. Change your password

**STEP 5** Click **Save Changes**.

**STEP 2**

Username  
Enter Username

Password  
Enter Password

Language  
English

Login  Remember me on this computer

**STEP 3**

**Status**

This menu shows the status of the device

System Information	System Information	System Information	
Hardware Model	CU	Base IP Address	192.168.0.1
Software Version	2.0.14.0.0.0	LAN Binding	1.9.0.0.0.0
Customer Serial Number	00170202010	WAN Binding	0.1.0.0.0.0
WiFi MAC Address	00-10-00-00-00-00	Product LAN Address	192.168.0.1/24
System Time	Thu 28 Aug 2020 21:49:00	LAN Binding	00-10-00-00-00-00
System Date	2020-08-28 21:49:00 (GMT+08:00) London, London	WAN Binding	00-10-00-00-00-00
System Time	00:00:00 19:00:00 UTC	WiFi MAC	00-10-00-00-00-00

**STEP 4**

Basic Settings

Wireless Mode: 802.11g/n/ac

Channel Bandwidth: 20MHz

SSID Name: Hitron

Save Changes Cancel

Multiple SSID Settings

SSID Name: Hitron

Password: Hitron12345678

Save Changes Cancel

**STEP 5**

For further assistance, please call:  
1-416-663-9600



Hitron CODA 4680 Installation Guide