



506N Installation Guide

Package Contents

Package Contents



COMWAVE 506N
INTERNET MODEM



ETHERNET CABLE



POWER ADAPTER
OUTPUT: 12V



TELEPHONE CORD



2 x INTERNET FILTER



- ① **DSL** Used to connect your Internet Modem to your Internet Line using the Telephone Cord supplied.
- ② **LAN** Used to connect to your computer using the Ethernet Cable supplied.
- ③ **DC 12V** Used to connect to a power source using the Power Adapter supplied.
- ④ **Switch** Used to power the Internet Modem on or off.

LED Light Indicators




Upon completion of set up, the following LED lights should be on.

Note: The example above shows LAN1 indicator lit. This may be different depending on the LAN port you plug in.

Please follow the step-by-step instructions on the following pages.

Installation Diagram

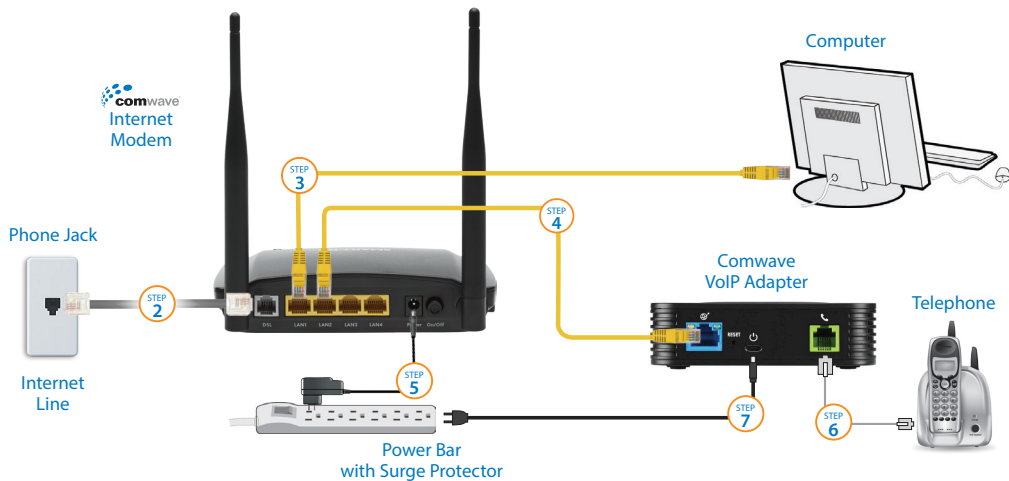

Continue to **step 1**

Installation Step-by-Step

- STEP 1** To begin installation, shut down your computer.
- STEP 2** Connect the Comwave Internet Modem using the supplied telephone cord to the phone jack.
- STEP 3** Connect the supplied Ethernet Cable from the LAN port of the Comwave Internet Modem to your computer.
- STEP 4** (For Home Phone) Connect the supplied Ethernet cable from the LAN port of your Comwave Internet Modem to the WAN port of the Home Phone Adapter.
- STEP 5** Connect the Comwave Internet Modem to a power outlet.
Note: Please allow up to 5 minutes for your modem to be operational.
- STEP 6** (For Home Phone) Connect a telephone to the PHONE 1 port on the Home Phone Adapter. Then connect power to the Home Phone Adapter and wait 5 minutes for a dial-tone. **DO NOT DISCONNECT POWER** as it may damage the Home Phone Adapter.
- STEP 7** Start your computer. You should be able to browse the Internet instantly.

Can't Access the Internet?

- 1** Unplug the power to your Comwave Internet modem, home phone adapter and shut down your computer.
- 2** Wait 30 seconds and then plug your Comwave Internet modem's power cord back into the power outlet.
- 3** Wait until the LED light indicators on your Comwave Internet modem indicate the modem is operational. This may take up to 5 minutes.
- 4** Start your computer and plug in the home phone adaptor into a power outlet.
- 5** Open your browser and start surfing the Internet. Check for a dial tone.

WE'LL GET YOU BACK UP ONLINE!

Wi-Fi Settings Step-by-Step

CAUTION

Your Comwave Internet Modem is already Wi-Fi enabled by Comwave. We **do not** recommend making any changes to the default settings. Only **advanced** users should attempt to make changes or shut off the Wi-Fi settings by following the steps below.

To log into your Wi-Fi, use the default login information found on the bottom of your modem.

To change your default Wi-Fi Username and Password make sure your computer is connected to your Internet Modem before you begin.



Advanced Wi-Fi Settings

For advanced users wishing to change their network name and/or password, follow the steps below.



STEP 1 Open your internet browser and type <http://192.168.17.1> in the address bar.

STEP 2 Enter your **Username** and **Password** and click **LOGIN** to proceed.

STEP 3 Click on **Wi-Fi** in the local network on left as shown in figure **3**.

STEP 4 Use caution when making any changes.

STEP 5 Click **Save**.

STEP 2

STEP 3

STEP 4

STEP 5

For further assistance, please call
416-663-9600



506N Installation Guide