TV Bundle Installation Guide

TV | CABLE INTERNET - CGNM 3550 | HOME PHONE - GS HT801

For assistance, please call
416-663-9600

V5 - CABLE

PACKAGE CONTENTS

INTERNET CABLE CONTENTS

INTERNET MODEM
(HITRON CGNM-3550)



ETHERNET CABLE

POWER ADAPTER

Items may not be exactly as shown

TV CONTENTS

COMWAVETV SET-TOP BOX
(ABOX M30)

REMOTE
(BATTERIES INCL.)

HDMI CABLE

POWER ADAPTER

Items may not be exactly as shown

HOME PHONE CONTENTS

HOME PHONE ADAPTER
(GRANDSTREAM HT801)

ETHERNET CABLE

POWER ADAPTER

Items may not be exactly as shown

ADVANCED WI-FI SETTINGS

For advanced users wishing to change their network name and/or password, follow the steps below.

STEP 1 Open your internet browser and type *http://192.168.0.1* in the address bar.

STEP 2 Enter your Username: "*cusadmin*" and Password: "*password*". Click *LOGIN* to proceed.

STEP 3 Click on the *Manage Wireless* button at the bottom right of the screen.

STEP 4 Click *Basic Settings* in the top menu to
a. Change your SSID network name
b. Change your password

STEP 5 Click *Save Changes*.

COMPLETE SETUP OVERVIEW

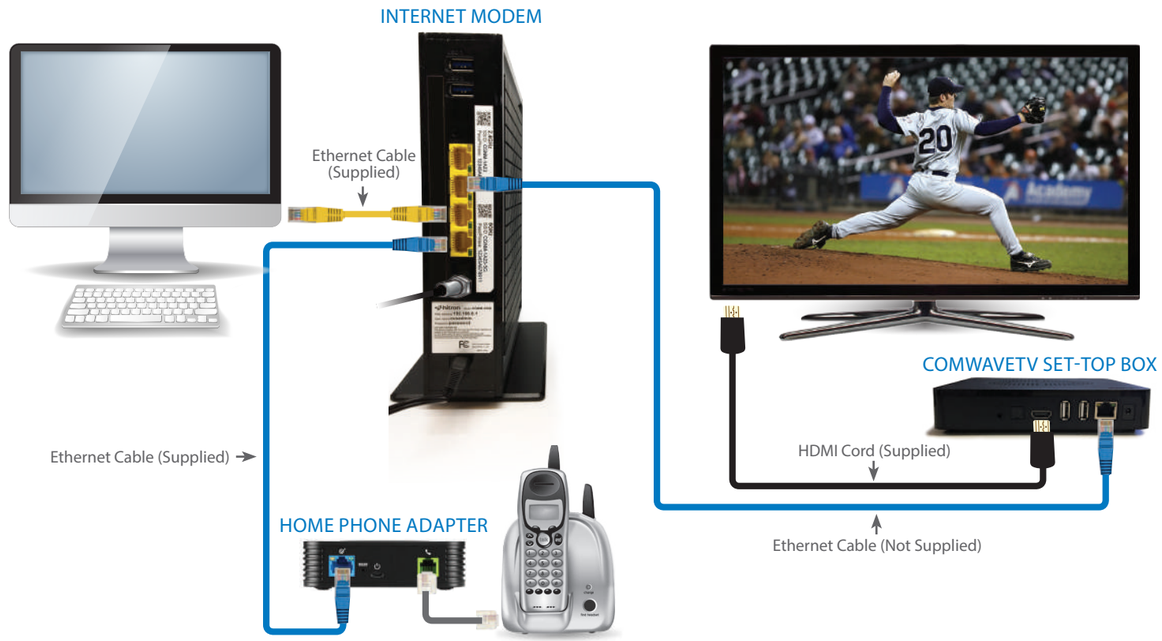

STEP A – INTERNET

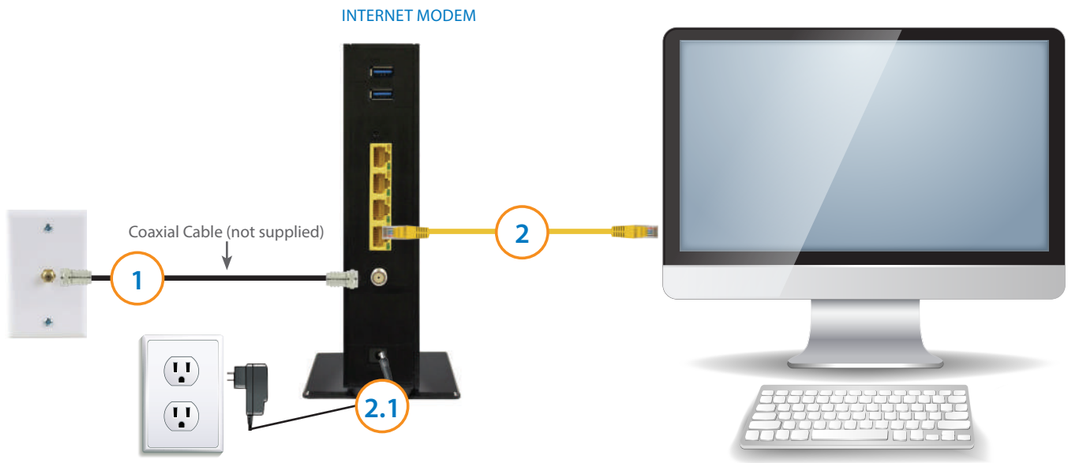

1 Connect the Comwave Internet Modem using a coaxial cable outlet in your home.

2 Connect one end of the supplied Ethernet Cable to the Internet Modem and the other end to your computer. For Wi-Fi instructions see "Setting up your WiFi" section.

2.1 Connect the Internet modem to power using the supplied power adapter.

Note: Connect the power cord directly into the wall outlet instead of a power bar.

STEP B – PHONE

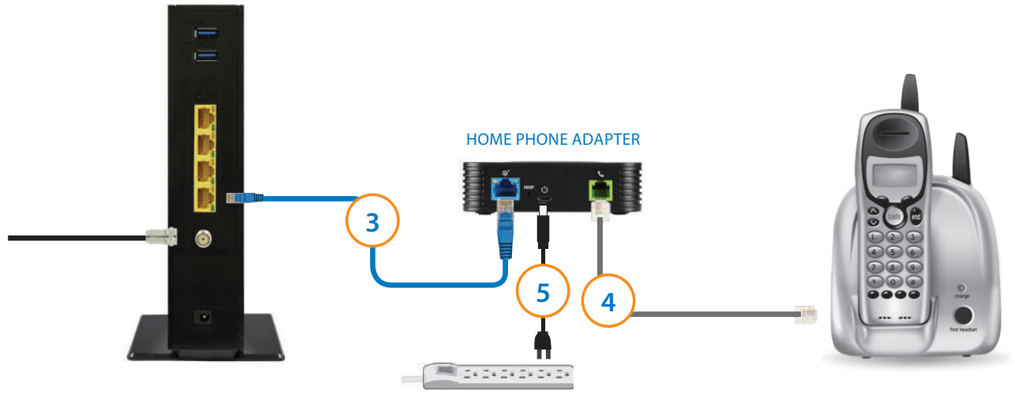

3 Connect one end of the supplied Ethernet Cable to the **WAN** port of the Home Phone Adapter and the other to any LAN port on the modem.

4 Connect your telephone to the **PHONE** port of the Home Phone Adapter.

5 Connect the Home Phone Adapter to power using the supplied power adapter and wait 5 minutes for the phone to register before use.

To test your phone line, pickup the phone receiver and listen for a dial tone. If you have no dial tone, please call Comwave support (phone number is on the back).

STEP C – TV

WIRED SETUP (RECOMMENDED)

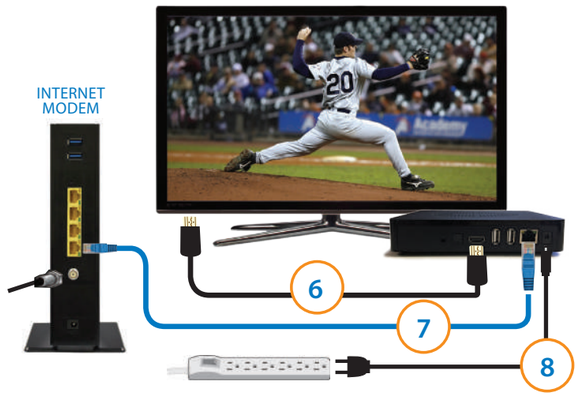

6 Using the supplied HDMI cable, connect one end to an **HDMI** port on your TV and the other end to the ComwaveTV set-top box. **Note:** Remember which HDMI port you used on your TV.

7 *(Wired Network - Recommended)* Connect an Ethernet cable from one end of the ComwaveTV set-top box to any LAN port on the Modem.

8 Connect the ComwaveTV set-top box to power using the supplied power adapter.

SETTING UP YOUR WI-FI

NOTE: FOR THE BEST TV EXPERIENCE, WE RECOMMEND THE INTERNET MODEM TO BE AS CLOSE AS POSSIBLE TO YOUR MAIN TV AND YOUR COMWAVETV SET-TOP BOX.
Once steps are completed, turn on your TV and select the correct HDMI input. Follow the on-screen instructions to connect ComwaveTV to your network.

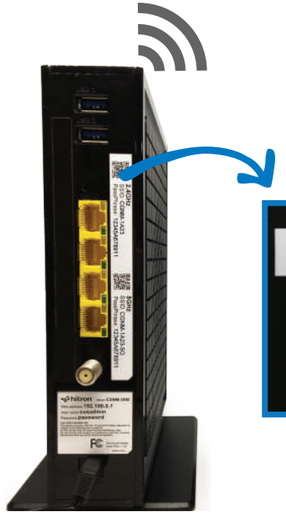

Hitron CGNM-3550

The network name (SSID) and password are located on the bottom of the modem. There are two to choose from. The 5GHz network usually performs the best.

If you would like to change the network name (SSID) and password, please see "ADVANCED WI-FI SETTINGS"